

Novel approach for Cooperative Massive MIMO for 5G Mobile System

¹KORATANA.YAMINI LATHA, ²BANDI. SARADA, ³T.RAVI BABU

¹PG Student, ^{2,3}Assistant Professor

DEPARTMENT OF ELECTRONICS AND COMMUNICATION,
SANKETHIKA VIDYA PARISHAD, VISAKHAPATNAM, INDIA

Abstract: The next generation of wireless data networks, or 5G, must address not only future capacity constraints but also existing challenges such as network reliability, coverage, energy efficiency and latency with current communication systems. Massive MIMO offers significant gains in wireless data rates and link reliability. It allows for data consumption from more users in a dense area without consuming any more radio spectrum or causing interference. This result in fewer dropped calls, a significant decrease in dead zones, and better quality data transmission, without spreading thin the increasingly scarce radio spectrum. Cooperative massive MIMO can achieve a more uniform data rate among all users, improving the system performance for cell edge users. This paper considers a massive MIMO wireless cellular system with L cells denoted as 1,2, ... , L respectively. Each cell consists of one base station with M antennas and K users equipped with only one antenna for reduced complexity. In this paper, we assume users use orthogonal pilot resources to acquire the Channel State Information [CSI]. In this paper, system level simulation performance of Noncooperative and cooperative massive MIMO systems for downlink performance is presented based upon current LTE systems considering different numbers of antennas deployed in the base station. It is shown that through cooperation among base stations, system performance of cell edge users can be significantly improved and better signal to noise ratio (SNR), low Bit Error Rate (BER) achieved in Cooperative massive MIMO than Noncooperative. The system simulations presented in this paper provide a view of the potential system performance that can be achieved by cooperative massive MIMO technologies in 5G systems.

Keywords: Cooperative Massive MIMO, Signal to noise Ratio, cell edge system performance, linear signal processing, multiuser MIMO.

I. INTRODUCTION

A. Multiple-Input Multiple-Output (MIMO) technology is a wireless technology that uses multiple transmitters and receivers to transfer more data at the same time. MIMO technology takes advantage of a radio-wave phenomenon called multipath where transmitted information bounces off walls, ceilings, and other objects, reaching the receiving antenna multiple times via different angles and at slightly different times. MIMO technology leverages multipath behaviour by using multiple, “smart” transmitters and receivers with an added “spatial” dimension to dramatically increase Performance and range. MIMO makes antennas work smarter by enabling them to combine data streams arriving from different paths and at different times to effectively increase receiver signal-capturing power. As a result of the use of multiple antennas, MIMO wireless technology is able to considerably increase the capacity of a given channel. By increasing the number of receive and transmit antennas it is possible to linearly increase the throughput of the channel with every pair of antennas added to the System.

B. MULTIUSER MIMO (MU-MIMO):

Multi-user MIMO or MU-MIMO is an enhanced form of MIMO technology that is gaining acceptance. MU-MIMO, Multi-user MIMO enables multiple independent radio terminals to access a system enhancing the communication capabilities of each individual terminal. Accordingly it is often considered as an extension of Space Division Multiple Access, SDMA. MU-MIMO exploits the maximum system capacity by scheduling multiple users to be able to simultaneously access the same channel using the spatial degrees of freedom offered by MIMO.

MU-MIMO on the downlink is especially interesting because the MIMO sum capacity can scale with the minimum of the number of base station antennas and the sum of the number of users times the number of antennas per user. This means that MU-MIMO can achieve MIMO capacity gains with a multiple antenna base station and a bunch of single antenna mobile users! This is of particular interest since real estate for multiple antennas is limited on small handheld devices. MU-MIMO has been discussed extensively in 3GPP LTE Advanced.

C. Massive MIMO (multiple-input multiple-output) wireless technology uses a very large number of antennas with an order of magnitude more antennas than current LTE systems and is a leading candidate for inclusion in 5G systems. This will offer significant improvements in both the throughput and energy efficiency. As the number of antennas increases without limit, it is known that the effects of uncorrelated noise and small-scale fading can be removed completely. That means when a large number of user terminals are scheduled simultaneously over the same physical layer resource, the channels of all the terminals are asymptotically orthogonal to each other, and both intra-cell and inter-cell user interference can be eliminated completely through linear signal processing

methods, e.g., MF (Matched Filter) precoding or MF detection for the downlink and uplink respectively. That also means each user will be presented with a flat fading channel, meaning that the channel is nearly identical in all subcarriers, so that each user may be scheduled with the full bandwidth, and the MAC (Media Access Control) resource allocation scheduling can be simplified and no control signalling of physical layer resource allocations will be required.

D. Cooperative massive MIMO [CM-MIMO] where multiple base stations cooperate together and form a distributed antenna array to serve multiple users simultaneously is an attractive alternative. In CM-MIMO, user data as well as CSI (channel state information) is shared among base stations that will provide more degrees of freedom for communication. Also, precoding can take into account inter-cell interference and thus mitigate inter-cell interference, which is especially critical for cell edge users that typically suffer more inter-cell interference. Furthermore, CM-MIMO, where multiple base stations coordinate through the backhaul network, the bandwidth of the backhaul link and delay may create additional impairments on the system performance. In this paper, system level simulation performance of cooperative massive MIMO and non-cooperative massive MIMO system performance is compared under the uniform framework of the LTE TDD system.

II. NON-COOPERATIVE AND COOPERATIVE SYSTEM

This paper considers a massive MIMO wireless cellular system with L cells denoted as 1,2, ..., L respectively as shown in Figure 1. Each cell consists of one base station with M antennas and K users equipped with only one antenna for reduced complexity. In this paper, we assume users use orthogonal pilot resources to acquire the Channel State Information [CSI], so pilot contamination is not considered.

A. Non-cooperative Massive MIMO System:

The base station j transmits a M* 1 precoded vector. The subscript Sfj means forward link and the subscript j denotes the base station index. User K in base station l receives the signal from the transmitted vectors from all the base stations, which is written as:

$$X_{kl} = \sqrt{\rho_f} \sum_{j=1}^L G_{jkl} S_{fj} + W_{kl} \tag{eq1}$$


where Pf is the signal-to-noise ratio of the forward link Wkl is the complex independent and identically distributed (i.i.d.) white Gaussian noise, and Gjkl is the 1 * M channel matrix between user K in base station L and M antennas in base station J (see Fig. 1). The symbol GJKL comprises the small-scale Rayleigh fading factors Hjkl and a large-scale factor that accounts for distance dependent attenuation and shadow fading and is assumed to be the same for all the M antennas in a base station [1].

$$G_{jkl} = H_{jkl} \beta_{jkl}^{1/2} \tag{2}$$

Assume linear MF precoding is used, and precise CSI is available in the base station, then the base station transmits.

$$S_{fj} = \sum_{m=1}^k G_{jmj}^* a_{mj} \tag{3}$$

Where Gjkl is the 1 * M channel matrix between user m and M antennas in base station j . The superscript *

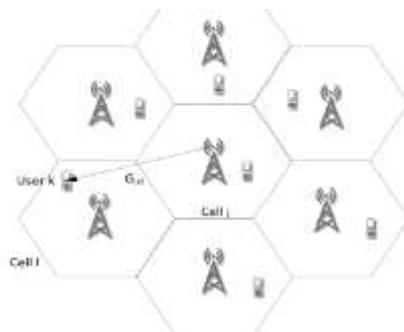

Denotes the Fig.1. Gjkl is channel matrix between user k in base station l and M antennas in base station j.conjugate transpose. The symbol amj is the transmitted symbols for user m in base station j.Substituting (3) into (1), then the received signal for user k in base station l is:

$$X_{kl} = \sqrt{\rho_f} \sum_{j=1}^L G_{jkl} \sum_{m=1}^k G_{jmj}^* a_{mj} + W_{kl} \tag{4}$$

As the number of antennas M is increased to infinity, the channels will be orthogonal to each other, since

$$G_{jkl}G_{jml}^* = \beta_{jkl}^{1/2} \beta_{jml}^{*1/2} H_{jkl}H_{jml}^* \rightarrow 0 \text{ when } l \neq j \text{ or } (l = j \text{ and } k \neq m)$$

$$G_{jkl}G_{jml}^* = \beta_{jkl} \|H_{jkl}\|^2 \rightarrow M\beta_{jkl} \text{ when } l = j \text{ and } k = m$$

.....5 & 6

according to random matrix theory. eq...(6) Where in frobenius norm: The received signal for user K in base station L becomes:

$$X_{kl} = \sqrt{\rho_f} M \beta_{lkl} a_{kl} + W_{kl} \quad \dots(7)$$

The SINR (signal-to-interference-plus-noise ratio) of user K in base station L becomes:

$$SINR_{kl} = \rho_f M^2 \beta_{lkl}^2 \quad \dots(8)$$

In (8), the small-scale fading effects disappear because (5)- (6) are assumed. When the number of antennas M is asymptotically increased to infinity, the assumptions of (5)-(6) will hold asymptotically, and (7)-(8) are true asymptotically. When the number of antennas m is limited, the assumptions of (5)-(6) will not hold, (7)-(8) cannot be derived. The received signal of user K in base station L becomes.

$$X_{kl} = \sqrt{\rho_f} \|G_{lkl}\|^2 a_{kl} + \sqrt{\rho_f} \sum_{m \neq k}^k G_{lkl} G_{lml}^* a_{ml} + \sqrt{\rho_f} \sum_{j \neq l}^L \sum_{m=1}^k G_{jkl} G_{jml}^* a_{mj} + W_{kl} \quad (9)$$

Then residual interference will exist, as (9) shows. The first 3 terms at the right hand of (9) are the signal of user k in base station l , intra-cell interference, and inter-cell interference for user k in base station l respectively.

B. Cooperative Massive MIMO System:

As with non-cooperative Massive MIMO system, in cooperative Massive MIMO system, the base station j transmits a $M * 1$ precoded vector S_{fj} . What is different is that each cooperative base station precodes the signals of all the $K*L$ users in the cooperative area at the same time.

$$S_{fj} = \sum_{m=1}^{K*L} G_{jml}^* a_{mj} \quad (10)$$

where the parameters in (10) mean the same as those in (3). Substituting (10) into (1), then the received signal for user K in base station L is:

$$X_{kl} = \sqrt{\rho_f'} \sum_{j=1}^L G_{jkl} \sum_{m=1}^{K*L} G_{jml}^* a_{mj} + W_{kl} = \sqrt{\rho_f'} \sum_{j=1}^L \|G_{jkl}\|^2 a_{kl} + \sqrt{\rho_f'} \sum_{m=1, m \neq k}^{K*L} \sum_{j=1}^L G_{jkl} G_{jml}^* a_{mj} + W_{kl} \quad (11)$$

where P_f' is the signal-to-noise ratio for the forward link, and other parameters in (11) mean the same as those in (4). As the number of antennas M is increased to infinity, (12)-(13) will hold. But the large-scale factor beta term for user K from different cooperative base stations are different, an effect known as power imbalance.

$$\sum_{j=1}^L G_{jkl} G_{jml}^* = \sum_{j=1}^L \beta_{jkl}^{1/2} \beta_{jml}^{1/2} H_{jkl} H_{jml}^* \quad (12)$$

$\rightarrow 0$ when $k \neq m$

$$\sum_{j=1}^L \|G_{jkl}\|^2 = \sum_{j=1}^L \beta_{jkl} \|H_{jkl}\|^2 \rightarrow \sum_{j=1}^L M \beta_{jkl} \quad (13)$$

The received signal of user k in base station l becomes:

$$X_{kl} = \sqrt{\rho_f'} \sum_{j=1}^L M \beta_{jkl} a_{kl} + W_{kl} \quad (14)$$

Compared with the non-cooperative case, the SINR of user K will be reduced because the large-scale factor beta term for user K from different cooperative base stations are generally different, the combination gain of the signal power for user K is lower as shown in the first term at the right hand of (14). When the number of antennas M is limited, the assumptions of (12)-(13) will not hold, inter-user for both intra cell and inter-cell

interference cannot be completely removed. The received signal of user K in base station L is shown in (11). For cell edge users, because the large-scale factor beta term for user K from different cooperative base stations are similar, which equals more transmit antennas with the same large scale factor, (12)-(13) become:

TABLE I SYSTEM SIMULATION CONFIGURATION

Parameters	Assumption
Cellular layout	Hexagonal grid, 7 cell sites, 1 sector per site wrap around
Cell radius	500 meters
Path loss model	3GPP 36.942 urban model
Lognormal Shadowing	Fading mean: 0 dB Standard deviation: 10 dB Shadowing correlation between sites: 0.5
Antenna pattern	Omni-directional
eNodeB antennas	ULA 15, 25, and 50 antennas
UE antennas	1 antenna
Carrier frequency/Duplex mode	TDD 2GHz
System bandwidth	20 MHz
Channel model	ITU Typical Urban (TU)
Receiver noise figure	9 dB
UE speed	30 km/h
Total BS TX power	46 dBm
Number of UEs	10 full buffer UEs in each cell
Scheduler	All-user Full bandwidth scheduling

$$\sum_{j=1}^L \|G_{jkl}\|^2 = \beta_{kl} \sum_{j=1}^L \|H_{jkl}\|^2 \quad (16)$$

From (15)-(16), we can observe that for cell edge users, where the power imbalance is less significant, the asymptotical properties will be more asymptotically true. That means, (15) will be more asymptotically zero, and (16) will be more asymptotically approaching to ML beta term. Therefore, compared with the non-cooperative case, the SINR will be higher because the combination gain of the signal power for cell edge users as shown in (16) is higher and inter-user for both intra-cell and inter-cell interference is lower as shown in (15). However, for cell centre users, it is the opposite and system performance may be degraded because power imbalance is more significant, the combination gain of the signal power is small and inter-user interference still exists, as can be verified in the system simulation in next section. So cooperative massive MIMO can achieve a more uniform data rate among all users, improving the system performance for cell edge users and degrading the system performance for cell centre users. The overall cell average system performance depends upon both the performance gain for cell edge users and the degradation for cell centre users.

III. SYSTEM LEVEL SIMULATION

A. System Level Simulation Setup:

The system level simulation is run using Matlab . The system simulation configuration is partly based upon LTE macro-cell system simulation baseline parameters as shown in Table I. Seven omni-directional sites are simulated with 10 single-antenna UEs in each site equipped with 15, 25, and 50 transmit antennas with ULA (Uniform Linear Array) configurations respectively. The path loss model of 3GPP 36.942 urban model is used. The TDD duplex mode is assumed, where the downlink channel matrix can be obtained through TDD channel reciprocity from the uplink channel matrix. A system bandwidth of 20 MHz and all-user full bandwidth scheduling are used, which means all 10 users in each cell are scheduled at the same time to the full bandwidth. In the simulation, for simplification of illustration, we assume that all the system bandwidth is available for downlink data transmission in each sub frame. The net system throughput for a specific TDD uplink-downlink configuration can be easily derived. In the simulation downlink MF precoding is utilized.

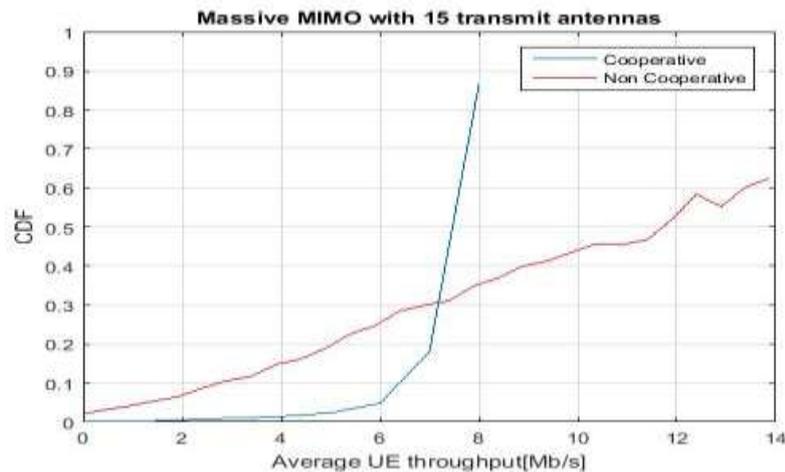


Fig 2.. UE throughput CDF for non-cooperative and cooperative massive MIMO with 15 transmits antennas.

Figure 2 shows the UE throughput CDF (Cumulative Distribution Function) for non-cooperative and cooperative massive MIMO with 15 transmit antennas deployed in each eNodeB. Table II also summarizes the 5% user throughput and cell average throughput for both non-cooperative and cooperative massive MIMO. It is observed that 5% user throughput is increased significantly from about 2.7 to 7.2 Mbps, whereas median user throughput is decreased from about 9 to 7.8 Mbps, and the cell average throughput is decreased from about 86.3 to 77.1 Mbps.

C. 25 Transmit Antennas:

Figure 3 shows the UE throughput CDF for noncooperative and cooperative massive MIMO with 25 transmit antennas deployed in each eNodeB. It is observed from Fig. 3 and Table II that 5% user throughput is increased significantly from about 4 to 10.5 Mbps, whereas median user throughput is decreased from about 13.5 to 11 Mbps, and the cell average throughput is decreased from about 123.0 to 112.2Mbps.

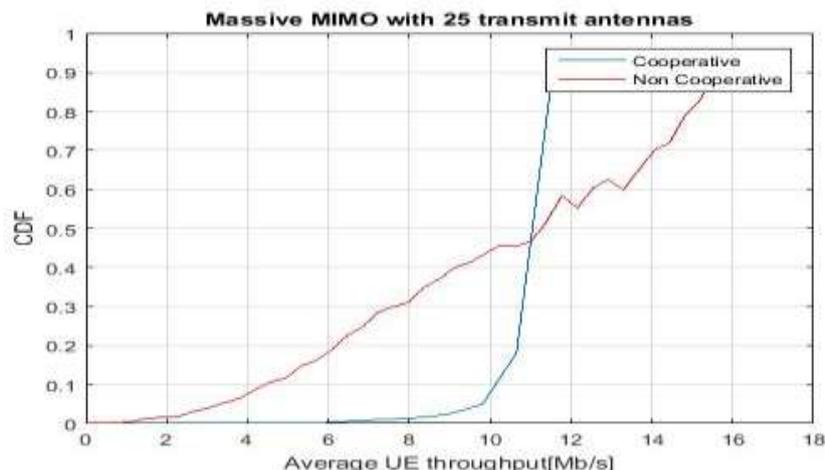


Fig.3. UE throughput CDF for non-cooperative and cooperative massive MIMO with 25 transmit antennas.

D. 50 Transmit Antennas

Figure 4 shows the UE throughput CDF (Cumulative Distribution Function) for non-cooperative and cooperative massive MIMO with 50 transmit antennas deployed in each eNodeB. It is observed from Fig 4 and Table II that 5 % user throughput is increased significantly from about 4 to 15.2 Mbps, whereas median user throughput is decreased from about 19 to 17.5 Mbps, and the cell average throughput is slightly increased from about 175.5 to 175.9 Mbps.


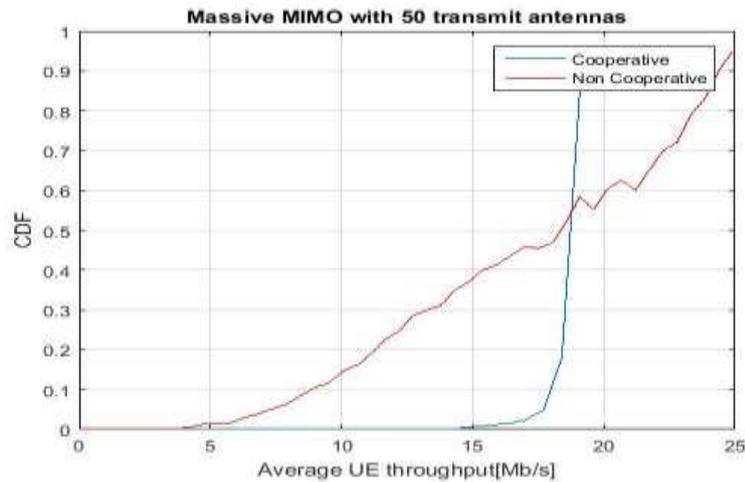


Fig.4. UE throughputs CDF for non-cooperative and cooperative massive MIMO with 50 transmit antennas

E. SNR VS BER:

As the fig shows the difference between two non cooperative and cooperative ,BER decreases when number of antennas increases as SNR (signal to noise ratio) maximizes upto some extent.

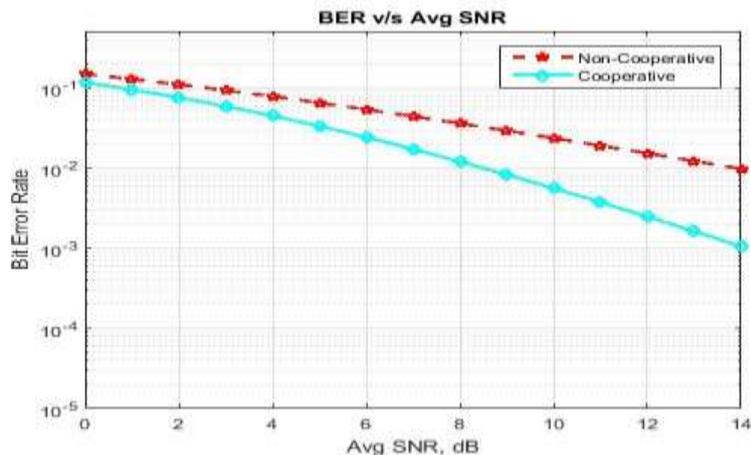

The above cases demonstrate that the cooperative massive MIMO can significantly improve cell edge users' system performance, whereas the cell average system performance is slightly degraded or maintained.

IV. CONCLUSIONS

In this paper, system level simulation performance of noncooperative and cooperative massive MIMO systems for downlink performance is presented based upon current LTE systems considering different numbers of antennas deployed in the base station. It is shown that through cooperation among base stations, system performance of cell edge users can be significantly improved, whereas cell average throughput is slightly degraded or maintained owing to the power imbalance for the cell centre users. The system simulations presented in this paper provide a view of the potential system performance that can be achieved by cooperative massive MIMO technologies in practical 5G systems. Future research will be on system performance evaluation of cooperative massive MIMO only for cell edge users based upon 3D channel models.

TABLE II SYSTEM SIMULATION PERFORMANCE

Cases		5 % User Throughput (Mbps)	Cell average Throughput (Mbps)
15 Antennas	Non-cooperative	2.7	86.3
	Cooperative	7.2	77.1
25 Antennas	Non-cooperative	4	123.0
	Cooperative	10.5	112.2
50 Antennas	Non-cooperative	4	175.6
	Cooperative	15.2	175.9

REFERENCES

- [1] T. L. Marzetta, "Noncooperative Cellular Wireless with Unlimited Numbers of Base Station Antennas," *IEEE Transactions on Wireless Communications*, vol. 9, no. 11, pp. 3590–3600, Nov. 2010.
- [2] F. Rusek, D. Persson, Buon Kiong Lau, E. G. Larsson, T. L. Marzetta, and F. Tufvesson, "Scaling Up MIMO: Opportunities and Challenges with Very Large Arrays," *IEEE Signal Processing Magazine*, vol. 30, no. 1, pp. 40–60, Jan. 2013.
- [3] Hien Quoc Ngo, E. G. Larsson, and T. L. Marzetta, "Energy and Spectral Efficiency of Very Large Multiuser MIMO Systems," *IEEE Transactions on Communications*, vol. 61, no. 4, pp. 1436–1449, Apr. 2013.
- [4] C. He and R. D. Gitlin, "Limiting Performance of Massive MIMO Downlink Cellular Systems," in *Information Theory and Applications Workshop (ITA)*, Feb. 2016.
- [5] R. W. Heath, T. Wu, Y. H. Kwon, and A. C. K. Soong, "Multiuser MIMO in Distributed Antenna Systems With Out-of-Cell Interference," *IEEE Transactions on Signal Processing*, vol. 59, no. 10, pp. 4885–4899, Oct. 2011.
- [6] R. Zakhour and S. V. Hanly, "Base Station Cooperation on the Downlink: Large System Analysis," *IEEE Transactions on Information Theory*, vol. 58, no. 4, pp. 2079–2106, Apr. 2012.
- [7] A. M. Tulino and S. Verdu, *Random Matrix Theory and Wireless Communications*. Hanover, MA: Now Publishers Inc, 2004.
- [8] J. C. Ikuno, M. Wrulich, and M. Rupp, "System Level Simulation of LTE Networks," 2010, pp. 1–5.
- [9] 3GPP, "TS 25.814 - V7.1.0 - Physical layer aspects for evolved Universal Terrestrial Radio Access (UTRA)." .
- [10] 3GPP, TS36.942-V12.0.0-LTE; Evolved Universal Terrestrial Radio access.