

A Comparative Study on High Rise Building for various Geometrical Shapes Subjected to Wind Load of RCC & Composite Structure using ETABS

¹Mr. Hatim Saleem, ²Prof. L. P. Shrivastava

Department of Civil Engineering,
M. M. College of Technology, Raipur, India

Abstract: In today's modern construction of high rise buildings, lateral loads such as wind load is of major concern. However Steel – Concrete Composite construction has gained wide acceptance worldwide as an alternative to pure steel or pure concrete construction. The review shows that, the composite structures are best suited for high rise buildings compared to that of RCC structures. They offer high stiffness, stability and strength which can be utilized to resist large lateral wind loads and simultaneously support the gravity loading of the structure. In this project, a comparative study has been carried using ETABS 15 software on high rise building for various geometrical shapes subjected to wind load for both RCC and Composite structure. The three geometrical shape of Rectangular, Triangular and a Plus shape are taken with each of similar base plan and same floor to floor height. All the frames are analyzed firstly using RCC frame and then Steel – Concrete Composite frame. The building frame is comprised of G+15 storey. By the analysis done using ETABS 15 software the values such as maximum storey displacement, maximum storey shear and maximum storey moment for both Reinforced Concrete and Steel – Concrete Composite structure and comparison has been done for all three geometrical shapes to compare which has more stability and resistance against wind load among all the cases considered.

Keywords: ETABS, RCC, Composite Structure, Wind Load, G+15, Geometrical shapes.

I. INTRODUCTION

There has been an increasing demand for construction of tall buildings due to ever-increasing urbanization and need of the population with it. As we increase the height of the building the risk of wind pressure increases. Thus a careful modeling of such wind pressures needs to be done, so as to evaluate the behavior of the structure with a clear perspective of the damage that is expected. Composite structures are generally made up of the interaction of different structural elements and may be developed using either different or similar structural materials. Composite construction has gain wide acceptance because of their many advantages such as they are faster to erect, lighter in weight, better quality control, speedy in terms of construction time, has better ductility than RCC structure and hence superior lateral load resisting behavior. Composite construction also enhances the life expectancy of the structure.

In this project analysis of the different structural models of two different geometrical shapes namely triangular and rectangular having total of 16 storied structure (G+15), with both Conventional RCC and Composite Structure and comparing them using ETABS software, to get the optimum and most reliable structural system with the most suitable geometrical shape of the assumed two shapes. A total of Six different cases of the model have been analyzed and designed as a frame structure by the computer application software ETABS, keeping the floor area of each model the same. The design involves load calculations and analyzing the whole structure modeling software and the design method used for analysis is Limit State Method conforming to the Indian Standard Code of Practice.

ETABS is a powerful program that can greatly enhance an engineer's analysis and design capabilities for structures. Part of that power lies in an array of options and features. The other part lies in how simple it is to use. ETABS is a completely integrated system. Embedded beneath the simple, intuitive user interface are very powerful numerical methods, design procedures and international codes, all working from a single comprehensive database. This integration means that you create only one model of the floor system and the vertical and lateral framing systems to analyze and design the entire building. ETABS is very convenient to perform wind loading analysis of the buildings.

II. LITERATURE REVIEW

A.S. Boke & K. R. Suryawanshi (2017) had presented their work, in their paper they compared reinforced concrete, steel and composite structures under the effect of static and dynamic loads. The result of this work showed that composite structures are best suited for high rise buildings compared to that of steel and reinforced concrete structures. Response spectrum method is used for comparison of three structures with the help of ETABS software. According to their study, Base shear for composite structure has reduced by 34% and for steel structure by 26% and Displacement for composite structure has increased by 49% and for steel structure by 46% compared to that of RCC structure. Also time required for construction of composite structures is less compared to that of R.C.C. structures as no formwork is required.

S. Gorakhnath Jadhav, R. Shrikant Sutar and V. Shriprasad Bankar (2017) had presented their paper, in their paper they deals with inelastic behavior of RCC and composite structures. The pushover analysis is carried out using ETABS and compared the various parameters like story drift, displacements etc. The conclusion they made are: -

From the equivalent linear analysis it is seen that the story drift reduces approximately up to 49%. As compared with RCC.

The story displacement is also reduces approximately up to 9%. From equivalent linear static analysis.

From pushover analysis it is seen that story displacement is decreased as compared to RCC.

Overall response of composite structure is better than RCC structure i.e. composite structure produces less displacement and resists more structure forces

Anupam Rajmani & Prof. Priyabrata Guha (2015) had presented their paper, in their submission, they analyzed and compared four different shaped buildings namely circular, rectangular, square and triangular. To achieve these purposes, the results are interpreted for different shaped buildings and of different stories thereby concluding with these following conclusions: -

With respect to node displacement triangular shaped building is least stable for 15 & 30 storied building whereas for 45 stories building rectangular shape is least stable.

In terms of maximum M_z triangular shape for 15 storey, rectangular shape for 30 storey and circular shape for 45 storey buildings are most stable respectively.

In terms of maximum F_y Rectangular shape for 15 storey, circular shape for 30 storey and rectangular shape for 45 storey buildings are most stable respectively.

Dr. U. P. Waghe & Shweta A. Wagh (2014) had presented their papers, they studied four different multistoried commercial buildings i.e. G+12, G+16, G+20, G+24. They analyzed and designed these structures using STAAD Pro software. In this the design of structures and cost estimation has been carried out using MS-Excel and comparison has been made between R.C.C. and composite structures. Based on their analysis they had drawn the following results from their study: -

In case of a composite structural system because of the lesser magnitude of the beam end forces and moments compared to an R.C.C. system, one can use lighter section in composite structures.

Under earthquake consideration because of inherent ductility characteristics, steel – concrete composite structure perform better than a R.C.C. structure.

Devang R. Panchal has submitted his paper on the topic ‘Augmented Analysis and Design of Composite Steel and Concrete Structures’, in this paper he had done a parametric study of building was carried out using utilizing features of STAAD Pro software with parameters as different types of beam section, various country codes, orientation of column and type of concrete. Also, earthquake analysis and design of a G+10 storied commercial building was carried out using equivalent static method and response spectrum method. Best effective and economical section sizes were close through optimization process and results obtained were compared to comment on the behavior of the structure under different seismic zones. In his study he came to the conclusion that initial cost of R.C.C. construction is cheaper compared to steel or steel-concrete composite construction. But steel – concrete structure is more efficient. It is cost efficient in almost all the cases provided the cost benefit analysis is carried out based on the life cycle of structure. From the analysis results it is quite clear that the composite construction is more suitable to resist the earthquake forces compared to R.C.C. construction.

III. METHODOLOGY

For this study, building of three geometrical shapes of Rectangular, Triangular and Plus shape base have been considered with both Conventional RCC structure and Steel-Concrete Composite structure. G+15 storied buildings are modelled using conventional structure of RCC beams, columns & slabs and composite structure of composite column and steel beam of three different shapes (Rectangular, Triangular and Plus shape). These buildings were given dimensions such that their base area would be same.

Table 1 –Description of Case Model Used in Frames

S.No.	Specifications	Model No.
1	G+15 Storied RCC structural model with Rectangular Base Plan	Case 01
2	G+15 Storied Composite structural model with Rectangular Base Plan	Case 02
3	G+15 Storied RCC structural model with Triangular Base Plan	Case 03
4	G+15 Storied Composite structural model with Triangular Base Plan	Case 04
5	G+15 Storied RCC structural model with Plus Base Plan	Case 05
6	G+15 Storied Composite structural model with Plus Base Plan	Case 06

Now, the model has to be designed for steel – concrete composite structure as well as conventional RCC beam column structure using ETABS software. For the purpose of comparison between the RCC structure and steel-concrete composite structure best efficient and economical section sizes are selected through assessing the maximum bending moment, shear force, maximum deflection, and nodal displacement of column due to load combination. The focus is on steel-concrete structural members, their connections and the effects of their interactions and reliability of the composite structure with general loading and wind loading applied on the structure over conventional reinforced concrete structure.

Assumptions for the modelling-

- Only the main block of the building is considered. The staircase are not considered in the design procedure.
- The beams are resting centrally on the column so as to avoid the conditions of eccentricity. This is achieved automatically in ETABS.
- For all structural elements, M25 and Fe415 grade of concrete and steel are used.
- The footing are not designed. Supports are assigned in the form of fixed supports.

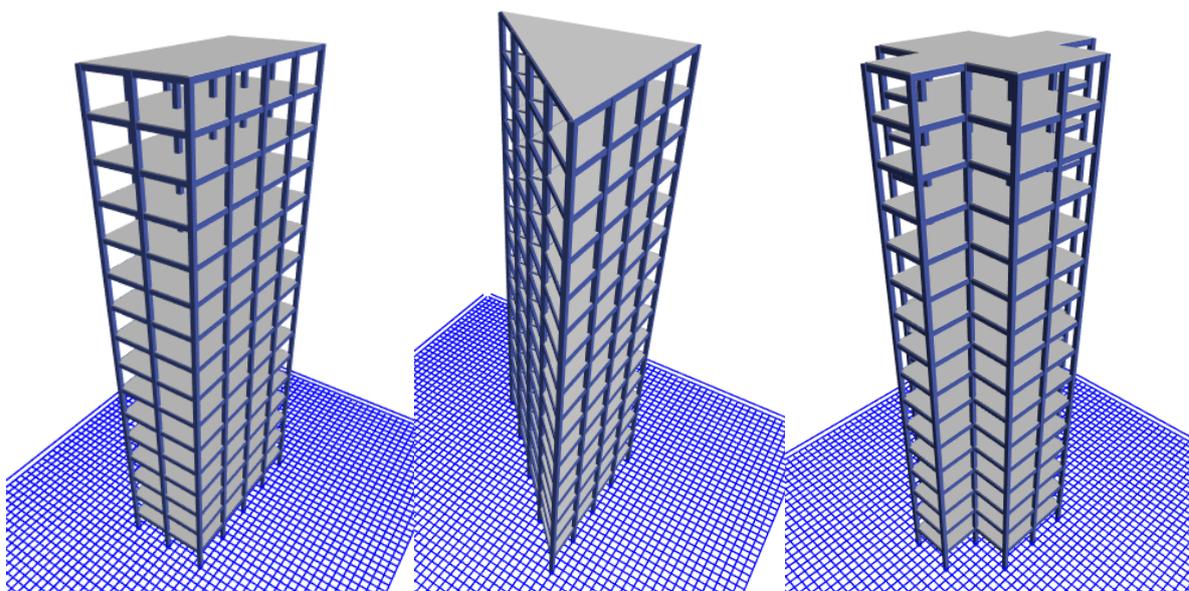


Fig. 1 – ETABS generated rendered model for cases 01, 02, 03, 04, 05, 06

Table 2 – Member Properties & Specifications for the Model

S. No.	Specification		Size	
1	Base Area		200 sq. m. (as per plan)	
2	Floor to floor height		3.5m	
3	Total height of the building (G+15)		56m	
4	Slab Thickness		150mm	
5	Type of structure		Conventional RCC & Composite	
6	Soil type (as per 1893:2002)		Medium	
7	Importance Factor		1	
8	Seismic Zone		Zone II	
9	Grade of Concrete		M25	
10	Grade of Steel		M415	
11	Beam Size		300mm X 450mm	
12	Column Size		500mm X 500mm	
13	Loads Applied	D.L.	Deal Load	calculated as per self-weight
			Floor Finish	1 kN/m ²
		L.L.	Live Load	2.5 kN/m ²
		W.L.	Wind Load	calculated as per IS 875 part3
14	Load Combination		1.2(DL + LL + WL)	

Section Properties

The built-up area considered are taken equal for all plans of different shaped frames, with base plan area of 200 sqm. The floor to floor height is taken as 3.5 meter making the total height of the structure 56 meter and the whole analysis has been carried out using ETABS software. Assigning the material properties for concrete grade M20 and Fe415, then assigning the section properties of beam of size 300mm x 450mm and column size of 500mm x 500mm with concrete grade of M20 and steel grade of Fe415 which are same for all frame structural cases considered.

The cross-section properties of the beam that are taken in the ETABS software are as shown in the figure below. RCC beam of size 300mm x 450mm for Conventional RCC frame structure and I-section (ISHB400) hot rolled beam for Composite structure for all three shaped model structure.

The cross-section properties of the Column that are taken in the ETABS software are as shown in the figure below. RCC Column of size 500mm x 500mm for Conventional RCC frame structure and Tabular section filled with concrete column section for Composite structure for all three shaped model structure.

IV. RESULT AND DISCUSSION


Comparison of Maximum Storey Displacement

The Maximum displacement (along Y-axis) for the each storey as per the output generated from the ETABS Software is given below in table.

Table 3 – Comparison of Maximum Storey Displacement (mm)

Storey	Storey Maximum Storey displacement (mm)					
	Case 01 RCC- Rectangular	Case 02 Composite- Rectangular	Case 03 RCC- Triangular	Case 04 Composite- Triangular	Case 05 RCC-Plus	Case 06 Composite- Plus
Sixteen	315.614	310.783	545.389	518.385	254.731	250.097
Fifteen	310.178	305.981	535.980	511.302	250.791	246.595
Fourteen	303.111	299.615	523.931	501.667	245.500	241.793
Thirteen	294.162	291.351	508.652	488.819	238.652	235.424
Twelve	283.317	281.120	490.090	472.602	230.237	227.439
Eleven	270.616	268.936	468.293	453.011	220.286	217.852
Ten	256.111	254.839	443.347	430.100	208.839	206.694
Nine	239.865	238.883	415.354	403.947	195.944	194.009
Eight	221.949	221.131	384.434	374.649	181.654	179.844
Seven	202.450	201.660	350.735	342.323	166.038	164.259
Six	181.469	180.553	314.433	307.097	149.175	147.323
Five	159.112	157.889	275.708	269.083	131.150	129.101
Four	135.474	133.703	234.714	228.305	112.043	109.629
Three	110.546	107.863	191.394	184.472	91.869	88.818
Two	83.813	79.681	144.771	136.314	70.253	66.119
One	52.074	46.566	88.998	79.249	44.477	39.237
Ground	0.000	0.000	0.000	0.000	0.000	0.000

Graph 1 – Comparison of Maximum Storey Displacement for all cases

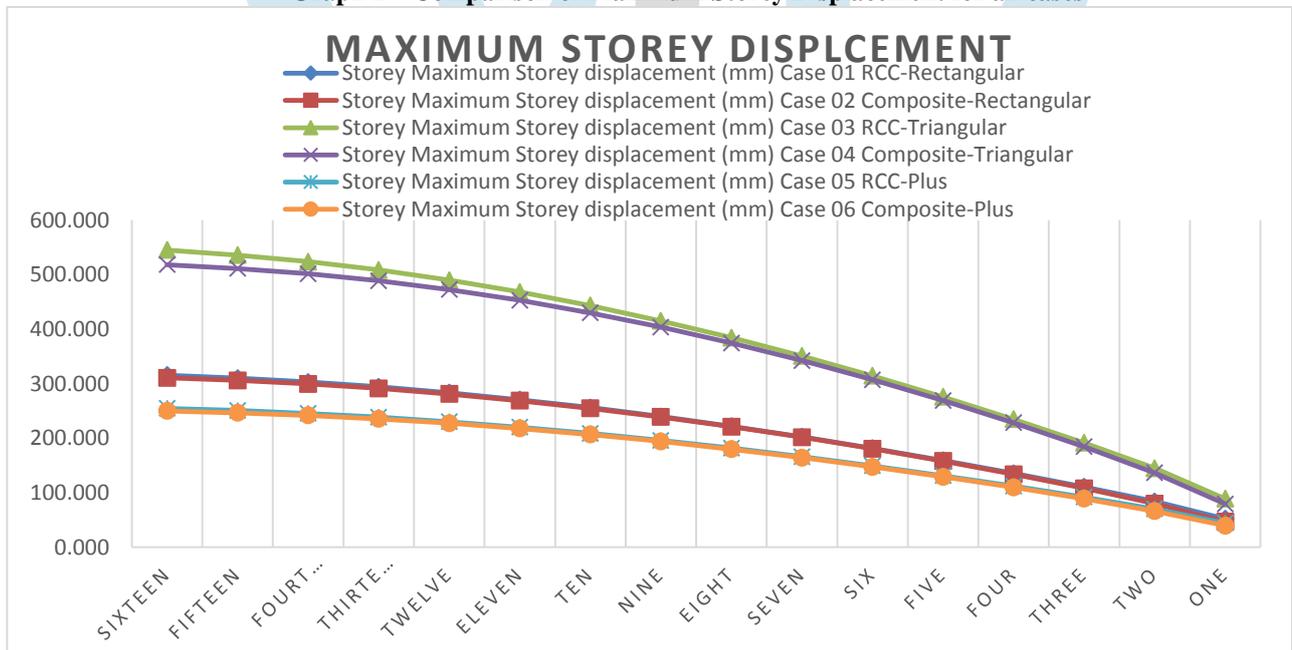

From the comparison of maximum storey displacement for Rectangular, Triangular & Plus plan the following results has been derived

- The value of maximum storey displacement in Composite Structure get decreased by about 1% for rectangular plan as compared to RCC Structure.
- The value of maximum storey displacement in Composite Structure get decreased by about 5% for triangular plan as compared to RCC Structure.
- The value of maximum storey displacement in Composite Structure get decreased by about approx. 2% for Plus plan as compared to RCC Structure.


- The value of maximum storey displacement in top floor get increased by about average 42% for RCC model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor decreased by around 23% for RCC Structure model.
- The value of maximum storey displacement in top floor get increased by about average 40% for RCC model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor get Decreased by about 24% for Composite Structure model.

Comparison of Maximum Storey Shear (in kN)

Table 4 – Comparison of Maximum Storey Shear for all cases

Maximum Storey Shear (kN)						
Storey	Case 01	Case 02	Case 03	Case 04	Case 05	Case 06
	RCC-Rectangular	Composite-Rectangular	RCC-Triangular	Composite-Triangular	RCC-Plus	Composite-Plus
Sixteen	4033.297	2601.662	3664.510	1370.139	1921.973	1668.110
Fifteen	8066.594	5203.323	7329.019	1240.278	3843.946	3336.220
Fourteen	12099.891	7804.985	10993.529	4110.417	5765.919	5004.330
Thirteen	16133.188	10406.647	14658.038	5480.555	7687.893	6672.439
Twelve	20166.484	13008.308	18322.547	6850.694	9609.866	8340.549
Eleven	24199.781	15609.970	21987.057	8220.833	11531.839	10008.659
Ten	28233.078	18211.632	25651.566	9590.972	13453.812	11676.769
Nine	32266.375	20813.294	29316.076	10961.111	15375.785	13344.879
Eight	36299.672	23414.955	32980.585	12331.249	17297.758	15012.989
Seven	40332.969	26016.617	36645.095	13701.388	19219.731	16681.098
Six	44366.266	28618.279	40309.604	15071.527	21141.705	18349.208
Five	48399.563	31219.940	43974.114	16441.666	23063.678	20017.318
Four	52432.860	33821.602	47638.623	17811.805	24985.651	21685.428
Three	56466.156	36423.264	51303.133	19181.944	26907.624	23353.538
Two	60499.453	39024.925	54967.642	20552.082	28829.597	25021.648
One	64532.750	41626.587	58632.152	21922.221	30751.570	26689.757

Graph 2 – Comparison of Maximum Storey Shear for all cases

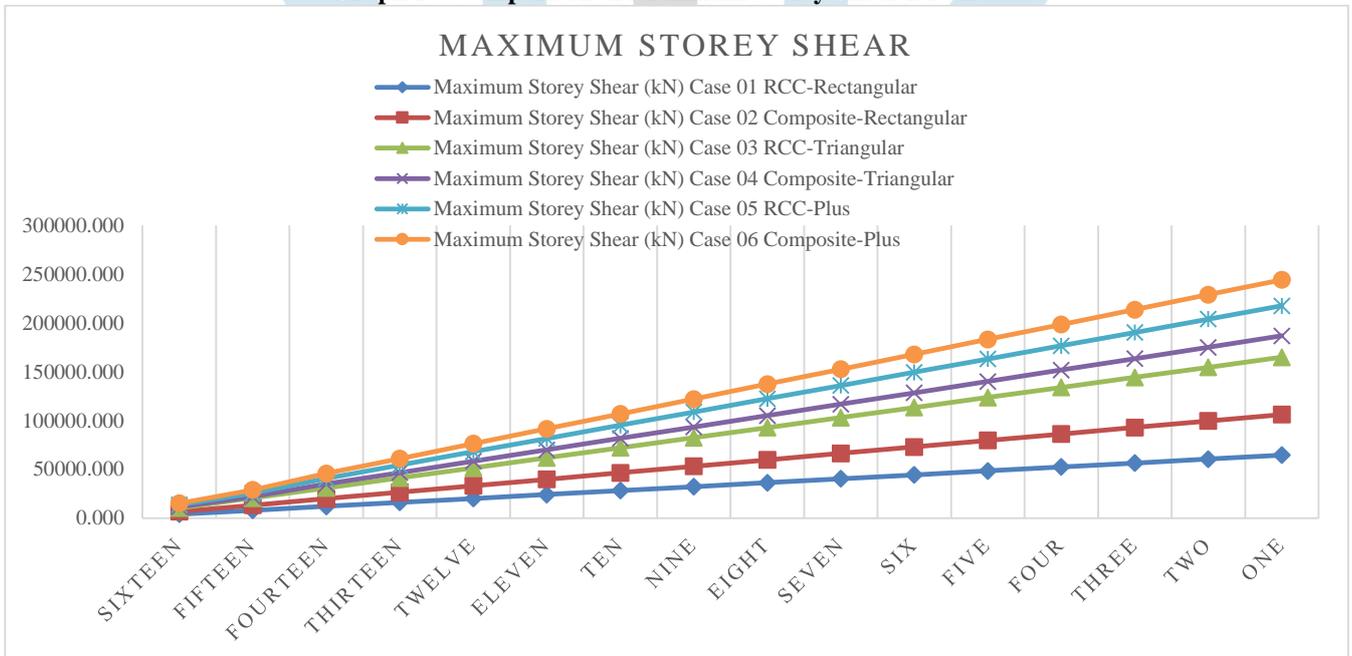

From the comparison of maximum storey Shear for Rectangular, Triangular & Plus plan the following results has been derived

- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about 35.50% for rectangular plan.
- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about 62.61% for triangular plan.


- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about 13.21% for Plus plan.
- As we change the structure from Rectangular to Triangular, the value of maximum storey displacement in top floor get decreased by about 9% for RCC model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor get decreased by about 52% for RCC Structure model.
- As we change the structure from Rectangular to Triangular, the value of maximum storey displacement in top floor get decreased by about 47% for Composite model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor get decreased by about 36% for Composite model.

Comparison of Maximum Storey Moment (kN-m)

Table 5 –Comparison of Maximum Storey Moment for all cases

Maximum Storey Moment (kN-m)						
Storey	Case 01	Case 02	Case 03	Case 04	Case 05	Case 06
	RCC-Rectangular	Composite-Rectangular	RCC-Triangular	Composite-Triangular	RCC-Plus	Composite-Plus
Sixteen	20550.052	13391.876	25825.711	9565.601	15645.845	12894.392
Fifteen	41862.899	27546.547	52414.215	19893.995	30359.527	26551.577
Fourteen	63930.339	42455.811	79757.314	30976.984	46675.282	40963.357
Thirteen	86741.215	58108.511	107843.848	42803.408	63734.471	56118.572
Twelve	110284.144	74493.264	136662.436	55361.886	81525.715	72005.841
Eleven	134547.835	91598.779	166201.784	68641.125	100037.720	88613.871
Ten	159521.081	109413.849	196450.689	82629.920	119259.280	105931.456
Nine	185192.424	127927.016	227397.690	97316.811	139178.937	123947.138
Eight	211544.788	147121.204	259025.712	112684.723	159779.615	142643.842
Seven	238556.624	166974.864	291313.206	128712.107	181039.765	162000.017
Six	266206.331	187466.395	324238.572	145377.363	202937.786	181994.064
Five	294470.166	208572.054	357778.065	162656.746	225449.935	202602.238
Four	323320.715	230264.427	391904.272	180522.844	248548.798	223797.126
Three	352779.727	252515.263	426588.943	198947.404	272206.125	245550.478
Two	382689.353	275316.713	461824.226	217922.578	296414.065	267854.442
One	401000.241	298668.760	497610.108	237448.350	321172.602	290709.005

Graph 3 – Comparison of Maximum Storey Moment

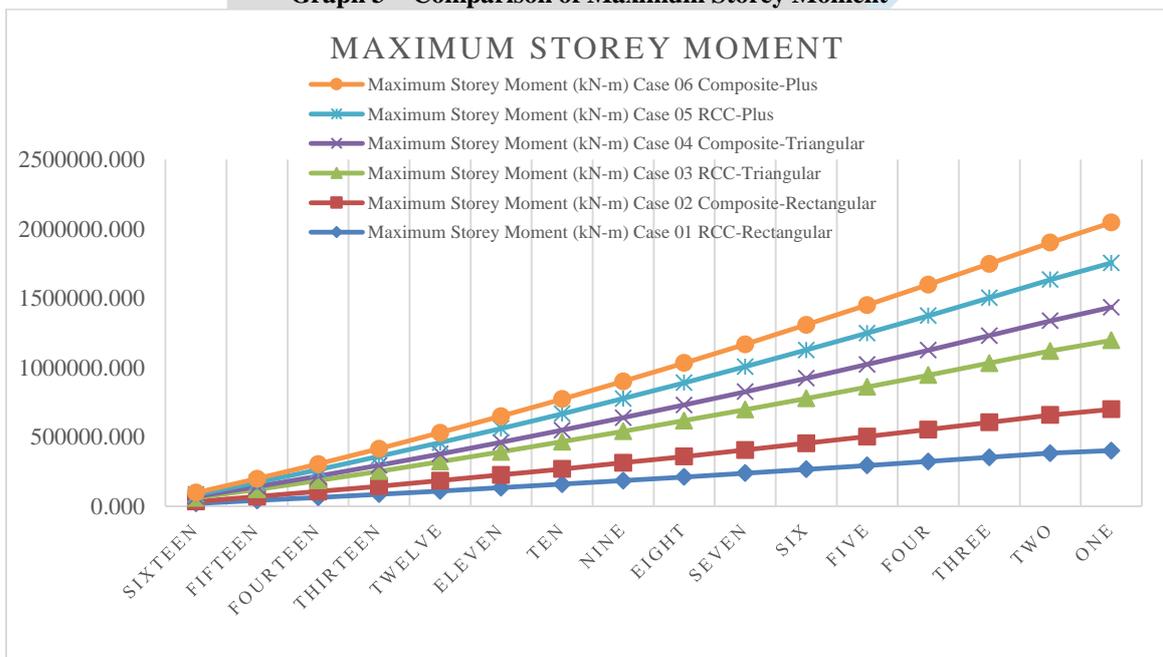

From the comparison of maximum storey Moment for Rectangular, Triangular & Plus plan the following results has been derived

- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about average 35% for rectangular plan respectively.

- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about average 63% for triangular plan respectively.
- As we change the structure from conventional RCC to composite, the value of maximum storey displacement in top floor get decreased by about average 18% for Plus plan respectively.
- As we change the structure from Rectangular to Triangular, the value of maximum storey displacement in top floor get increased by about 20% for RCC model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor get decreased by about 31% for RCC Structure model.
- As we change the structure from Rectangular to Triangular, the value of maximum storey displacement in top floor get decreased by about 29% for Composite model and as we change the structure from Rectangular to Plus, the value of maximum storey displacement in top floor get decreased by about 4% for Composite Structure model

V. CONCLUSIONS

- In all the cases considered the values of storey displacements are within permissible limits as per IS code limits.
- It is safe to conclude that case-06 with Plus plan of Composite frame structure gives best result from all the cases that has been compared and is more stable than other cases.
- As we chamfer the edged of rectangular or square plan frame structure the resistance to the lateral wind load increases and with the help of Steel – Concrete Composite structure the stability of the structure can be further increased.
- The size of the steel beams of Steel-Concrete Composite frame structure from RCC frame structure reduces by about 25% approximately. Thus dead load of the composite structure is less as compared to RCC frame structure, which gives economical foundation design.
- Also as time required for construction of composite structures is less compared to that of RCC structures as no formwork is required. Thus Steel-Concrete Composite structures are more economical in case of high rise buildings.
- Steel-Concrete Composite frame follows strong column weak beam behaviour, as hinges are formed in beam element rather than column element.
- Composite columns are also used widely in practice to resist predominantly compressive loading and appear in different form including concrete filled section, recently using high strength high performance concrete.
- The further development of steel framed buildings depends largely on the use of composite construction as its construction is speedy and reduces the erection time.

REFERENCES

- [1] S. Boke and K. R. Suryawanshi; “*Comparative Study of RCC and Steel-Concrete Composite (G+10) Residential Building*”; Journal of Information, Knowledge and Research in Civil Engineering, Vol. 04 Issue 02, pp. 411-416, October 2017
- [2] Anupam Rajmani and Prof. Priyabrata Guha; “*Analysis of Wind and Earthquake Load for Different Shapes of High Rise Building*”; International Journal of Civil Engineering and Technology (IJCIET), Vol. 06 Issue 02, pp. 38-45, February 2015
- [3] Shweta A. Wagh, Dr. U. P. Waghe; “*Comparative Study of R.C.C. and Steel Concrete Composite Structures*”, International Journal of Engineering Research and Applications, Vol. 4 Issue 4 (Version 1), April 2014, pp. 369-376
- [4] S. Gorakhnath Jadhav, R. Shrikant Sutar and V. Shriprasad Bankar; “*Comparative Analysis of RCC and Steel-Concrete Composite Multistoried Building*”; Journal of Information, Knowledge and Research in Civil Engineering, Vol.-04 Issue-02, pp. 398-404, October 2017
- [5] Devang R. Panchal; “*Augmented Analysis and Design of Composite Steel and Concrete Structures*”.